


Mosaic™ Double USB socket - Type-A

Cat. no(s): 0 775 94 - 0 791 94L - 0 793 84/94




1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

Designation	White	Mat Black	Black	Aluminium
Double USB socket 5 V _{DC} - 2.4 A	0 775 94	0 791 94L	0 793 84	0 793 94

3. OVERALL DIMENSIONS (mm)

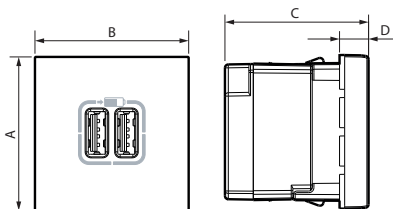

A	B	C	D
45	45	42	8.5

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Screwdriver: flat 3.5 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Base: PC
 Cover-plate: ABS
 White RAL 9003
 Painted Aluminium varnished glittery
 Painted Mat Black RAL 9017 satin

Self-extinguishing:
 850° C / 30 s for insulating parts holding live parts in place.
 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Climatic characteristics

Storage temperature: - 20° C to + 70° C
 Operating temperature: 0° C to + 45° C

■ 5.4 Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Maximum input current	300 mA
Maximum power consumption in standby	0.1W
Power average efficiency	81 %
Nominal output voltage	5 V _{DC}
Maximum output current	2.4 A
No-load power consumption class and average efficiency level: level VI*	
Protection class	II - Low voltage

*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note: To optimize the charging time of your device, ensure turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.